

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04L 1/12, 1/20	A1	(11) International Publication Number: WO 98/49800 (43) International Publication Date: 5 November 1998 (05.11.98)
(21) International Application Number: PCT/SE98/00753 (22) International Filing Date: 24 April 1998 (24.04.98) (30) Priority Data: 08/846,630 30 April 1997 (30.04.97) US (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors: LABONTE, Sylvain; 380 St-Bruno de Montarville, Quebec J3V 2S7 (CA). TURCOTTE, Eric; 460 Abelard 1B, Verdun, Quebec H3E 1B5 (CA). (74) Agent: ERICSSON RADIO SYSTEMS AB; Common Patent Dept., S-164 80 Stockholm (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: ESTIMATION OF RADIO CHANNEL BIT ERROR RATE IN A DIGITAL RADIO TELECOMMUNICATIONS NETWORK		
(57) Abstract		
<p>A system for determining when a radio telecommunications network should switch between a first grade of service and a second grade of service based upon a highly accurate and reliable estimate of the bit error rate BER. The system estimates (65) the BER on an uplink and a downlink on a user channel, and determines (66) whether the BER on the uplink and the downlink on the user channel are below a first set of thresholds. The system then measures the residual SFET RBER and the frame erasure rate FER on the voice channel uplink, and determines (74) whether the downlink BER, the uplink RBER, and the uplink FER are lower than a second set of thresholds. If lower, the system sends and receives a data message on a Fast Associated Control Channel (FACCH). The system obtains a highly accurate estimate (83) of the BER on a downlink on the FACCH channel, and reports (88) the downlink BER in a message on the FACCH channel uplink. The system then estimates the BER on the FACCH channel uplink. Finally, the system switches the radio telecommunications network from the first grade of service to the second grade of service in response to determining that the uplink and downlink BER on the FACCH channel are below a third set of thresholds.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

-1-

ESTIMATION OF RADIO CHANNEL BIT ERROR RATE IN A DIGITAL RADIO TELECOMMUNICATIONS NETWORK

BACKGROUND OF THE INVENTION

5 Technical Field of the Invention

This invention relates to radio telecommunication systems and, more particularly, to a system and method of estimating radio channel bit error rate in a digital radio telecommunications network.

10 Description of Related Art

In digital radio telecommunications networks, the quality of the transmitted signal is often expressed in terms of how many of the received bits are corrupted, leading to the expression Bit Error Rate (BER). The BER
15 indicates how many of the total number of bits are wrongly detected. With the introduction of data services in radio telecommunications networks, systems that provide two grades of service are being developed. A high grade of service utilizes high level modulation to provide higher
20 service quality for data or improved voice services. A lower grade of service utilizes low level modulation to provide service quality which is adequate for traditional voice applications. A system and method of switching between one grade of service and the other is needed.
25 Such a system must identify which level of service is being provided, assess the adequacy of the provided service, and if the service is not adequate, perform a switch between the two. In order to accomplish these objectives, a more accurate method of determining the BER
30 is needed.

Although there are no known prior art teachings of a solution to the aforementioned deficiency and shortcoming such as that disclosed herein, U.K. Patent Application Number GB 2,232,854 A (GEC-Marconi), U.S.
35 Patent Number 5,418,789 (Gersbach), and U.S. Patent Number

-2-

5,406,562 (Roney) discuss subject matter that bears some relation to matters discussed herein. The GEC-Marconi patent discloses a method of assessing the quality of a data channel based on the processing of soft decision demodulation information. The BER may be determined more quickly because sampling time is reduced due to the use of soft decisions within a known band of levels rather than hard decisions which require longer sampling time. The GEC-Marconi patent, however, does not teach or suggest a system or method of determining the BER with such accuracy and reliability that it can be used to determine when a radio telecommunications network should switch from a low grade of service to a high grade of service.

The Gersbach patent discloses a system and method for rapidly estimating the bit error rate of a data signal which has been reconstructed from a received data signal. A bit error rate calculator is integrated with a nearly instantaneous bit error rate estimator which utilizes timing and amplitude degradation information. The Gersbach patent, however, does not teach or suggest a system or method of determining the BER with such accuracy and reliability that it can be used to determine when a radio telecommunications network should switch from a low grade of service to a high grade of service.

The Roney patent discloses a BER estimation process which receives encoded data over a channel, decodes the data, and estimates the number of errors induced by the channel. Roney discloses a method of estimating the BER on a Fast Associated Control Channel (FACCH) as well as the BER on the user channel. The two BER estimates are compared, and the difference is utilized to determine whether the received data is convolutionally encoded user information or a FACCH message. The Roney patent, however, does not teach or suggest a system or method of determining when a radio telecommunications network should switch between one grade of service and another based upon a highly accurate and reliable estimate of the BER.

-3-

Review of each of the foregoing references reveals no disclosure or suggestion of a system or method such as that described and claimed herein.

5 In order to overcome the disadvantage of existing solutions, it would be advantageous to have a system and method of determining when a radio telecommunications network should switch between one grade of service and another based upon a highly accurate and reliable estimate of the BER. The present invention provides such a system
10 and method.

SUMMARY OF THE INVENTION

In one aspect, the present invention is a system for determining when a radio telecommunications network should
15 switch between a first grade of service and a second grade of service based upon a highly accurate and reliable estimate of the bit error rate (BER). The system includes means for estimating the BER on an uplink and a downlink on a user channel, and means for determining whether the
20 BER on the uplink and the downlink on the user channel are below a first threshold. The system also includes means for sending and receiving a data message on a Fast Associated Control Channel (FACCH) in response to determining that the BER on the uplink and the downlink
25 on the user channel are below the first threshold. The system also includes means for estimating the BER on an uplink and a downlink on the FACCH channel, means for estimating a residual bit error rate (RBER) on the uplink on the FACCH channel, and means for estimating a frame
30 erasure rate (FER) on the uplink on the FACCH channel. The system then determines whether the BER on the downlink on the FACCH channel is below a second threshold, whether the RBER on the uplink is below a third threshold, and whether the FER on the uplink is equal to zero. If all
35 three conditions are met, the system switches the radio telecommunications network from the first grade of service to the second grade of service.

-4-

In another aspect, the present invention is a method of determining when a radio telecommunications network should switch between a first grade of service and a second grade of service based upon a highly accurate and reliable estimate of the bit error rate (BER). The method begins by estimating the BER on an uplink and a downlink on a user channel, and determining whether the BER on the uplink and the downlink on the user channel are below a first threshold. The method then sends and receives a data message on a Fast Associated Control Channel (FACCH) in response to determining that the BER on the uplink and the downlink on the user channel are below the first threshold. This is followed by estimating the BER on an uplink and a downlink on the FACCH channel, estimating a residual bit error rate (RBER) on an uplink on the FACCH channel, and estimating a frame erasure rate (FER) on the uplink on the FACCH channel. The method then determines whether the BER on the downlink on the FACCH channel is below a second threshold, whether the RBER on the uplink is below a third threshold, and whether the FER on the uplink is equal to zero. This is followed by switching the radio telecommunications network from said first grade of service to said second grade of service in response to determining that all three conditions are met.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be better understood and its numerous objects and advantages will become more apparent to those skilled in the art by reference to the following drawing, in conjunction with the accompanying specification, in which:

FIG. 1 (Prior Art) is a simplified functional block diagram illustrating the functions performed in an existing method of estimating the bit error rate (BER) in a radio telecommunications network;

FIG. 2 is a graph of voice quality (VQ) and BER as a function of the carrier to interference (C/I) ratio for

-5-

a high level modulation (HLM) scheme and a low level modulation (LLM) scheme in the preferred embodiment of the present invention;

FIG. 3 (Prior Art) is an illustrative drawing illustrating the number of bits and classes of bits encoded in a speech transmission and in a Fast Associated Control Channel (FACCH) message transmission;

FIG. 4 is a functional block diagram illustrating the functions performed in the method of the present invention when estimating the BER for a speech transmission on the user channel;

FIG. 5 is a functional block diagram illustrating the functions performed in the method of the present invention when estimating the BER during transmission of a FACCH message on the FACCH channel; and

FIGS. 6A-6C are a flow chart illustrating the steps of the preferred embodiment of the present invention.

DETAILED DESCRIPTION OF EMBODIMENTS

When a radio telecommunications network is operating in the high grade of service, and it is detected that the radio channel quality is degrading, then the network must switch back to the lower grade of service to maintain voice quality. To detect that voice quality is degrading with the speech coder on the high rate is relatively simple. When a high bit error rate (BER) is measured, and it exceeds a predetermined threshold, then the system switches the network back to the lower grade of service.

Changing from the lower grade of service to the higher grade is more complicated. The network may be operating in a mode that is less demanding in terms of radio channel conditions, and the network, therefore, is already offering a good radio channel quality (i.e., low BER). The system must decide at that time whether the radio channel conditions are good enough to support the higher grade of service in which there is a higher level modulation, higher rate voice coder, etc. Thus, the

-6-

system must assess the quality of a good channel which has a low BER. Therefore, a very accurate BER measurement is required.

5 There are advantages in changing to the higher grade of service. The high rate modulation supports the use of a high rate voice coder. The high rate voice coder inherently is better quality than a low rate voice coder, and provides excellent service. However, if the channel conditions degrade, the voice quality degrades very
10 rapidly when utilizing the high rate voice coder. In those cases, the system changes to low level modulation with low rate voice coder which is more robust.

Today's techniques for measuring BER are not sufficient to identify the low BER threshold that triggers
15 the system to change to high grade service. FIG. 1 is a simplified functional block diagram illustrating the functions performed in an existing method of estimating the BER in a radio telecommunications network 1. A transmitter 2 includes an encoder 3 which takes bits of data (bit_{data}) and adds redundancy bits to form a
20 transmitted bit stream ($bit_{transmit}$). As the encoded $bit_{transmit}$ is transmitted over the user channel of a digital traffic channel (DTC) 4, errors are incurred. A receiver 5 includes a detector 6, a decoder 7, and an encoder 8 which is identical to the transmitter encoder 3. The
25 detector 6 detects the received bit stream ($bit_{receive}$) which includes both correct and incorrect bits.

The $bit_{receive}$ is decoded by the decoder 7 in a process in which error correction is performed, and the redundancy
30 bits are removed, to produce a corrected bit stream ($bit_{corrected}$). The $bit_{corrected}$ is approximately the same as the bit_{data} , with the exception of residual errors that could not be recovered. If it is assumed that the $bit_{corrected}$ is equal to the bit_{data} , and the $bit_{corrected}$ are
35 applied through the encoder 8 (which is identical to the transmitter encoder 3), then the output ($bit_{encoded}$) should be equal to $bit_{transmit}$. However, because of the residual

-7-

errors in the $\text{bit}_{\text{corrected}}$, they are not exactly equal. The $\text{bit}_{\text{encoded}}$ is then sent to a BER estimator 9 where $\text{bit}_{\text{encoded}}$ is compared to $\text{bit}_{\text{receive}}$ to determine the BER. Thus, an estimate of the bits transmitted (i.e., $\text{bit}_{\text{encoded}}$) is compared with the bits received to directly determine BER. However, this calculation is inherently flawed because the residual errors in the $\text{bit}_{\text{corrected}}$ make the estimate of $\text{bit}_{\text{transmit}}$ inaccurate.

When the system identifies the BER as being low, this estimate must be accurate or else changing to the high modulation and high voice coder rate may result in a loss of voice quality rather than a gain. Therefore, it is critical that the system and method for determining the BER be accurate and reliable. The present invention provides a system and method by which very low BERs are accurately evaluated with a high level of confidence.

FIG. 2 is a graph of voice quality (VQ) and bit error rate (BER) as a function of the carrier to interference (C/I) ratio for a high level modulation (HLM) scheme and a low level modulation (LLM) scheme in the preferred embodiment of the present invention. The C/I is directly related to the radio channel condition. That is, a high C/I indicates good radio channel conditions while a low C/I indicates poor radio channel conditions. The solid line 11 represents BER as a function of C/I for the low level modulation (LLM) scheme utilizing a 8 kb/s voice coder (vocoder). The dashed line 12 represents BER as a function of C/I for the high level modulation (HLM) scheme utilizing a 16 kb/s vocoder. The solid line 13 represents VQ as a function of C/I for the low level modulation (LLM) scheme utilizing a 8 kb/s voice coder (vocoder). The dashed line 14 represents VQ as a function of C/I for the high level modulation (HLM) scheme utilizing a 16 kb/s vocoder.

In very good channel conditions (i.e., high C/I), the voice quality for the high level modulation scheme is significantly better than the voice quality with the low

-8-

level modulation. In poor channel conditions (i.e., low C/I), on the other hand, the voice quality for the low level modulation scheme is significantly better than the voice quality with the high level modulation. There is a crossover point at 15. For system management purposes, it is desirable to determine when the network should change to the high level modulation because the C/I is to the right of the crossover point 15, and when the network should change to the low level modulation because the C/I is to the left of the crossover point 15. Direct measurements of the C/I are difficult and may be unreliable. Therefore, this determination is made by measuring the bit error rate (BER).

The two curves 11 and 12 show the BER as a function of C/I. For any given C/I, the BER is higher for the high level modulation than it is for the low level modulation. The present invention measures BER. If the network is operating in low level modulation, and the BER falls below a threshold value (BER_{up}) 16, the system changes the network to the high level modulation. By changing to high level modulation, voice quality rises from point 17 to point 18 on the graph. BER also rises (from point 19 to point 21), but this rise is acceptable since voice quality is better even at the higher BER.

If the quality of the channel degrades (i.e., the C/I falls), the BER follows dashed line 12 to the left from point 21. When the BER rises above a threshold value (BER_{down}) 22, the system changes the network to the low level modulation. By changing to low level modulation, voice quality rises from point 23 to point 24 on the graph. At the same time, BER falls from point 25 to point 26.

Estimating the BER at BER_{down} 22 is a relatively easy task because it is a high BER. The low BER at BER_{up} 16 is difficult to measure because the system has to measure a large number of bits for each measured error. Existing procedures to measure BER are not capable of providing the

-9-

degree of accuracy and reliability required for measuring BER at this level. The BER curve 11 is very flat at this point, and small errors in the BER measurement result in large differences in C/I estimates. These differences can impact greatly the decision to change from the low level modulation to the high level modulation.

The present invention evaluates the BER on a Fast Associated Control Channel (FACCH) rather than the user channel of the DTC. The DTC carries both voice bits and data bits, but not simultaneously. The voice bits are on the user channel and the data bits are on the FACCH channel. Each slot contains 260 bits. When voice bits are sent in the slot, the bits are encoded in a particular way. When data bits are sent (for example, when sending a FACCH message), these 260 bits are encoded in a different way. This encoding is described in more detail below. The encoding for data bits is more robust than the encoding for voice bits, therefore, error correction is more effective. Since error correction is more effective, the bit_{encoded} (see FIG. 1) is a more accurate estimate of the bits transmitted. Therefore, when the bit_{encoded} is compared to bit_{receive} to determine the BER, the determination is more accurate on the FACCH channel.

FIG. 3 is an illustrative drawing illustrating the number of bits and classes of bits encoded in a speech (voice) transmission frame 31 and in a FACCH message (data) transmission frame 32. For the speech frame, there are two classes of voice bits: Class 1 bits and Class 2 bits. There are 77 Class 1 bits. Twelve (12) Class 1a bits 33 have the cyclical redundancy check (CRC) error detection scheme applied to them, and 65 class 1b bits 34 do not. The 77 Class 1 bits (and 7 CRC bits) are protected with a one-to-two (1/2) coder (i.e., one redundancy bit is added for each voice bit). Thus, a total of 178 encoded Class 1 bits are transmitted. There are 82 Class 2 bits 35 which are not encoded (i.e., they

-10-

are transmitted with no error protection at all). Thus, a total of 260 bits are transmitted.

5 The payload 36 of the FACCH message frame 32 is 49 bits in length. A 16-bit CRC 37 is added to the payload to increase the bits to 65. All 65 bits are encoded by a one-to-four ($1/4$) coder because for every bit that goes into the coder, four bits come out of it. The 65 bits multiplied by 4 equals 260 bits transmitted over the air. The CRC is an error detection technique while the encoding is error correction coding. Thus, the signal has a much greater amount of redundancy to the bit stream than voice.

10 The present invention, however, is intended for use with a voice channel, with voice bits on it. However, as noted above, the voice bits are less robustly encoded, therefore, they are more prone to errors, and the BER estimation on the user channel is not as accurate. However, BER estimation on the user channel is sufficient for continuous monitoring of the BER. Therefore, the present invention utilizes BER estimation on the user channel to monitor channel conditions until a more accurate estimation is required.

20 FIG. 4 is a functional block diagram illustrating the functions performed in the method of the present invention when estimating the BER for a speech transmission on the user channel. The 260 bits are received at a receiver detector 41 and are passed to a de-interleaver 42 which separates class 1 bits and class 2 bits. When Class 1 bits are received, a $1/2$ decoder 43 decodes them into 77 bits. Of those 77 Class 1 bits, only 12 Class 1a bits have the CRC error detection scheme applied to them. Thus, out of 159 voice bits (77 class 1 bits and 82 class 2 bits), the accuracy of only 12 bits is known. The decoded class 1a bits and the CRC are sent to a CRC decoder 44. If the CRC applied to those 12 Class 1a bits is good, then the frame is good. If there is a CRC discrepancy, then the frame is dropped by the CRC decoder 44 as a frame error. The frame erasure rate (FER) is

-11-

measured over 26 frames, and is the ratio of the frames that did not pass the CRC check to the total number of frames.

5 The CRC process goes in parallel with the BER estimation process. BER is calculated on every received frame, whether the frame is rejected by the CRC decoder 44 or not. In other words, BER is calculated on all frames that were decoded - in the frames where the errors were all corrected by the system, and also in the frames
10 where all the errors were not corrected by the system. In those frames where the errors are not corrected by the system, the bits are unreliable, and the BER that is calculated for those frames is not reliable.

The decoder removes the redundancy bits and produces
15 a corrected bit stream which is sent to a 1/2 encoder 45 identical to the encoder utilized at the transmitter (not shown). The output, which approximates the bits transmitted, are passed to a BER detector 46 where they are compared with the detected class 1 bits. Class 2 bits
20 are passed directly from the de-interleaver 42 to a speech decoder 47. Decoded class 1a bits and class 1b bits are also passed to the speech decoder 47 from the 1/2 decoder 43.

The residual BER is the BER calculated on only the
25 frames that pass the CRC check. The present invention monitors the BER and the residual BER. Monitoring the residual BER and the frame erasure rate (FER) provides a better, more reliable estimate of the actual BER. The system monitors the residual BER in parallel with the FER
30 because residual BER only indicates the BER on the accepted frames. It does not indicate how many frames were refused.

When channel conditions are good, the system makes an accurate BER estimation to determine whether the BER
35 is at BER_{up} 16 (FIG. 2). This is done by interrupting the voice on the user channel long enough to send a short FACCH message over the FACCH channel and estimate the BER.

-12-

The FACCH message replaces voice for one or two frames while the system makes an accurate BER estimate. Then a reliable decision can be made whether to change to high level modulation. The FACCH message is sent on the downlink (i.e., from the base station to the mobile station) and orders the mobile station to report the number of bit errors in the FACCH message it received. The mobile station replies by sending a FACCH message containing the requested information (i.e., bit errors on the FACCH downlink) (BE_{F_DL}). The base station receives the message from the mobile station and determines the bit errors on the FACCH uplink (BE_{F_UL}).

FIG. 5 is a functional block diagram illustrating the functions performed in the method of the present invention when estimating the BER during transmission of a Fast Associated Control Channel (FACCH) message on the FACCH channel. The 260 bits are received at a receiver detector 51. They are sent to a 1/4 decoder 52 which is matched to the encoder that was used at the transmitter (not shown). The output of the decoder 52 is a 16 bit CRC and 49 bits of data. A CRC decoder 53 checks the CRC, which is the error detection mechanism, and ascertains whether the CRC still matches the 49 bits, and whether there are errors left in the decoded bits. If there are errors detected, there is a frame error and the CRC decoder discards the frame because the coding/decoding scheme did not manage to prevent errors. In parallel with this, the 49 decoded bits and the 16 CRC bits are sent to a 1/4 encoder 54 identical to the one that was used in the transmitter, in order to regenerate the 260 transmitted bits. The regenerated bits and the detected bits are sent to a BER detector 55. By comparing the 260 bits that were detected and the 260 bits that were regenerated, the BER detector determines the BER. Thus, the BER comes from the BER detector 55, and the frame error rate or frame erasures come from the CRC decoder 53.

-13-

FIGS. 6A-6C are a flow chart illustrating the steps of the bit error rate estimation process of the preferred embodiment of the present invention. In general, there are three levels in the estimation process. On level 1, the process monitors the BER uplink and downlink on the voice channel with the existing method of estimating BER. When the BER uplink and downlink are estimated to be lower than predetermined thresholds for a specified period of time, then the process moves to level 2. On level 2, the process measures residual BER and the frame erasure rate (FER) on the uplink, and if these measurements indicate that there are no errors in the system, then frames are not dropped. The process then moves to level 3. On level 3, a FACCH message replaces the voice and is sent over the downlink FACCH channel. An accurate estimate is then made of the number of bit errors on the downlink FACCH channel. The bit errors are then converted to a BER, and the downlink BER is reported by the mobile station in a FACCH uplink message on which the system evaluates the uplink BER.

Referring to FIG. 6A, the level 1 process monitors the BER uplink and downlink on the voice channel with the existing method of estimating BER. The process begins at step 61 where a counter C_1 is reset to zero (0). Counter C_1 counts the number of times that the procedure fails to measure a low BER at steps 66, 74, and 84. Counter C_1 counts up to C_{1_MAX} , which may be set, for example, at a value of 2. At step 62, it is determined whether or not $C_1 \leq C_{1_MAX}$. If C_1 is not less than or equal to C_{1_MAX} , then the process moves to step 63 where the process exits and reports a failure. The failure may be reported by a code indicating that an accurate low BER value could not be determined. If, however, it is determined at step 62 that C_1 is less than or equal to C_{1_MAX} , then the process moves to step 64 where a timer T_1 is reset to zero (0). Timer T_1 measures the time period over which the BER is

-14-

monitored in level 1, and may be set to approximately 5 seconds.

5 The process then moves to step 65 where the process monitors the BER on the uplink (BER_{UL}) and the BER on the downlink (BER_{DL}). At step 66, it is determined whether or not $BER_{UL} < B_{UL_1}$ and $BER_{DL} < B_{DL_1}$. B_{UL_1} and B_{DL_1} are predetermined thresholds for BER on the uplink and downlink, respectively. If not, the process moves to step 67 where the counter C_1 is incremented. The process then returns to step 62. If yes at step 66, the process moves to step 68 where it is determined whether or not timer T_1 has expired. If not, the process returns to step 65 and continues to monitor BER_{UL} and BER_{DL} . If, however, timer T_1 has expired, the process moves to step 71 in FIG. 6B.

15 Referring to FIG. 6B, the level 2 process measures residual BER (RBER) and the frame erasure rate (FER) on the uplink. At step 71, a timer T_2 is reset. Timer T_2 measures the time period over which the RBER and the FER are monitored in level 2, and may be set to approximately 5 seconds. At step 72, the RBER and the FER measurements are reset, and the process then monitors the BER on the downlink, and the RBER and FER on the uplink ($RBER_{UL}$ and FER_{UL}) at 73. The process then moves to step 74 where each of these measurements are compared to various thresholds. It is determined whether or not the $BER_{DL} < B_{DL_2}$, $RBER_{UL} < B_{UL_2}$ and $FER_{UL} = 0$. B_{DL_2} and B_{UL_2} are predetermined thresholds for BER on the uplink and downlink, respectively. If not, the process moves to step 75 where the counter C_1 is incremented. The process then moves to step 76 where the process returns to step 62 in FIG. 6A. If yes at step 74, the process moves to step 77 where it is determined whether or not timer T_2 has expired. If not, the process returns to step 73 and continues to monitor BER_{DL} , $RBER_{UL}$, and FER_{UL} . If, however, timer T_2 has expired, the process moves to step 81 in FIG. 6C.

-15-

Referring to FIG. 6C, the level 3 process makes an accurate estimate of the number of bit errors on the FACCH channel, converts the bit errors to a BER, and reports the BER by the mobile station. At step 81, a FACCH counter C_F is reset to zero (0). The FACCH counter C_F counts the number of times that FACCH messages are sent in level 3, up to a maximum predetermined limit of C_{F_MAX} . At 82, a timer T_3 is reset to zero (0). Timer T_3 measures the time interval between FACCH messages in level 3, and may be set to expire at approximately 2 seconds. The process then moves to step 83 and monitors the BER_{DL} , $RBER_{UL}$, and FER_{UL} , in other words, the BER on the downlink, and the RBER and FER on the uplink. The process then moves to step 84 where each of these measurements are compared to various thresholds. It is determined whether or not the $BER_{DL} < B_{DL_3}$; $RBER_{UL} < B_{UL_3}$; and $FER_{UL} = 0$. If not, the process moves to step 85 where counter C_1 is incremented. The process then moves to step 86 where it returns to step 62 in FIG. 6A. If yes at step 84, the process moves to step 87 where it is determined whether or not timer T_3 has expired. If not, the process returns to step 83 and continues to monitor BER_{DL} , $RBER_{UL}$, and FER_{UL} . If, however, timer T_3 has expired, the process moves to step 88.

At step 88, the process sends and receives a FACCH message on the FACCH channel and makes an accurate estimate of the bit errors on the FACCH (BE_F) on the uplink and the downlink. The base station sends a message telling the mobile station to report the number of bit errors in the last FACCH message it received. The mobile station replies by sending a FACCH message containing the requested information (i.e., bit errors on the FACCH downlink) (BE_{F_DL}). The base station receives the message from the mobile station and determines the bit errors on the FACCH uplink (BE_{F_UL}). At step 89, the process records the largest BE_{F_UL} and the largest BE_{F_DL} to date.

The process then moves to step 90 and increments the FACCH counter C_F . At 91, the process determines whether

-16-

or not the number of times that FACCH messages have been sent in level 3 is greater than the maximum predetermined limit of C_{F_MAX} . If not, the process returns to step 82. If, however, $C_F > C_{F_MAX}$, the process moves to step 92 and exits and reports the largest BE_{F_UL} and the largest BE_{F_DL} to date.

It is thus believed that the operation and construction of the present invention will be apparent from the foregoing description. While the method, apparatus and system shown and described has been characterized as being preferred, it will be readily apparent that various changes and modifications could be made therein without departing from the spirit and scope of the invention as defined in the following claims.

-17-

WHAT IS CLAIMED IS:

1. A system for determining when a radio telecommunications network should switch between a first grade of service and a second grade of service based upon a highly accurate and reliable estimate of the bit error rate (BER), said system comprising:

means for estimating the BER on an uplink and a downlink on a user channel;

means for determining whether the BER on the uplink and the downlink on the user channel are below a first threshold;

means for sending and receiving a data message on a Fast Associated Control Channel (FACCH) in response to determining that the BER on the uplink and the downlink on the user channel are below the first threshold;

means for estimating the BER on an uplink and a downlink on the FACCH channel;

means for estimating a residual bit error rate (RBER) on the uplink on the FACCH channel;

means for estimating a frame erasure rate (FER) on the uplink on the FACCH channel;

means for determining:

whether the BER on the downlink on the FACCH channel is below a second threshold;

whether the RBER on the uplink is below a third threshold; and

whether the FER on the uplink is equal to zero; and

means for switching the radio telecommunications network from said first grade of service to said second grade of service in response to determining that the BER on the downlink on the FACCH channel is below a second threshold, the RBER on the uplink is below a third threshold, and the FER on the uplink is equal to zero.

-18-

2. A method of determining when a radio telecommunications network should switch between a first grade of service and a second grade of service based upon a highly accurate and reliable estimate of the bit error rate (BER), said method comprising the steps of:

estimating the BER on an uplink and a downlink on a user channel;

determining whether the BER on the uplink and the downlink on the user channel are below a first threshold;

sending and receiving a data message on a Fast Associated Control Channel (FACCH) in response to determining that the BER on the uplink and the downlink on the user channel are below the first threshold;

estimating the BER on an uplink and a downlink on the FACCH channel;

estimating a residual bit error rate (RBER) on an uplink on the FACCH channel;

estimating a frame erasure rate (FER) on the uplink on the FACCH channel;

determining whether the BER on the downlink on the FACCH channel is below a second threshold, whether the RBER on the uplink is below a third threshold, and whether the FER on the uplink is equal to zero; and

switching the radio telecommunications network from said first grade of service to said second grade of service in response to determining that the BER on the downlink on the FACCH channel is below a second threshold, the RBER on the uplink is below a third threshold, and the FER on the uplink is equal to zero.

3. A method of estimating uplink and downlink bit error rates (BER) in a radio telecommunications network, said method comprising the steps of:

monitoring the uplink and downlink BER on a voice channel;

-19-

determining that said uplink and downlink BER are lower than a first set of predetermined thresholds for a specified period of time;

measuring residual BER on the voice channel uplink;

5 measuring the frame erasure rate (FER) on the voice channel uplink;

10 determining that the downlink BER, the uplink residual BER, and the uplink FER are lower than a second set of predetermined thresholds for a specified period of time;

 sending a Fast Associated Control Channel (FACCH) message on the FACCH channel downlink;

 estimating the number of bit errors on the FACCH channel downlink;

15 converting the number of bit errors to a downlink BER;

 reporting the downlink BER in a message on the FACCH channel uplink; and

20 estimating the uplink BER from the message received on the FACCH channel uplink.

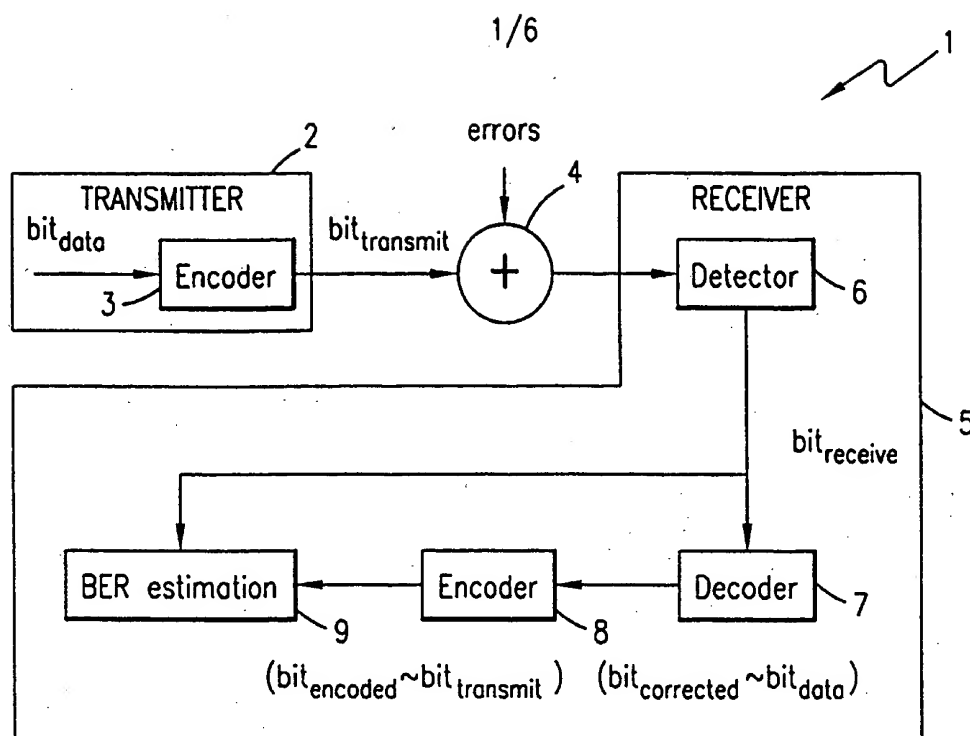


FIG. 1 (Prior Art)

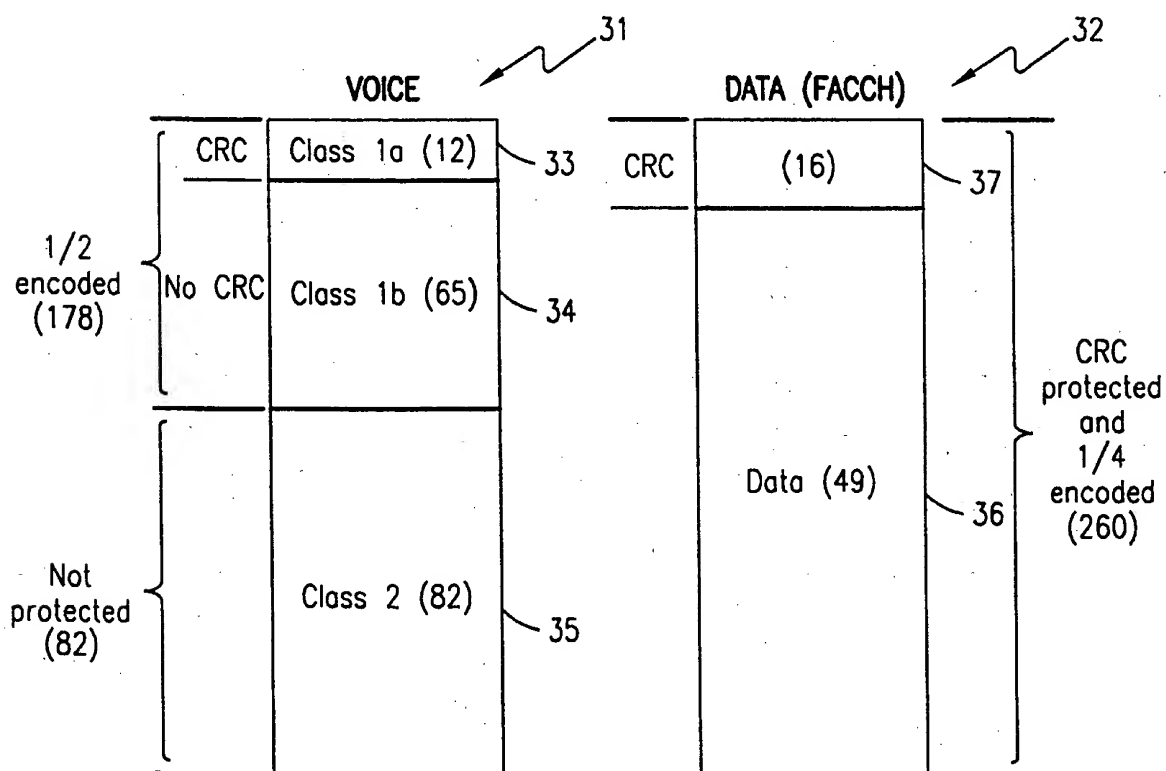


FIG. 3 (Prior Art)

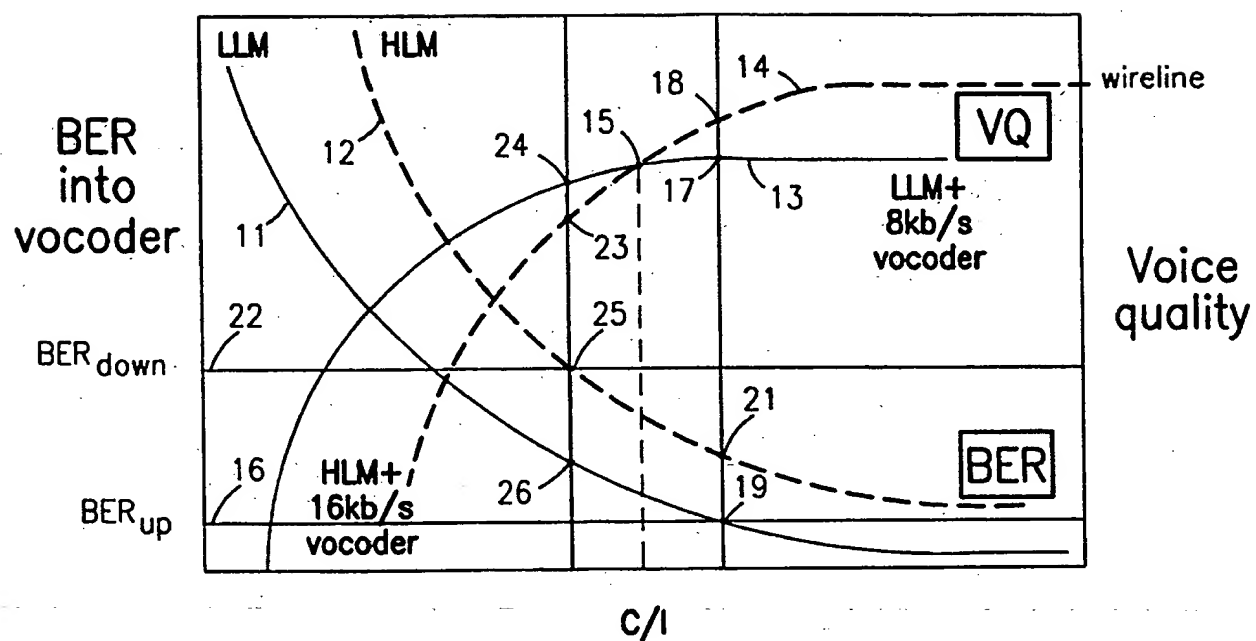


FIG. 2

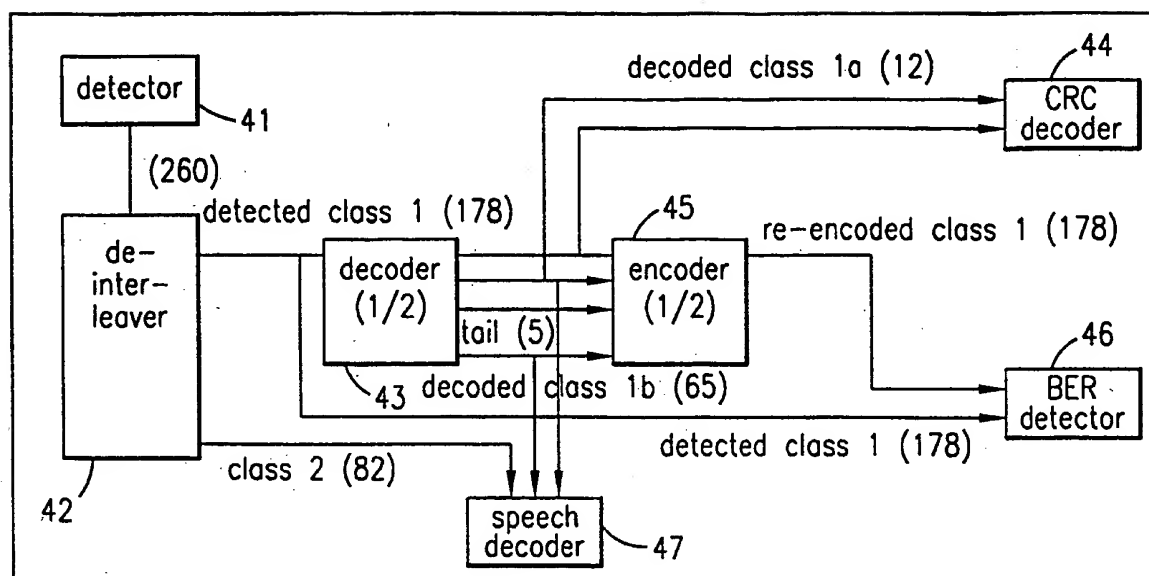


FIG. 4

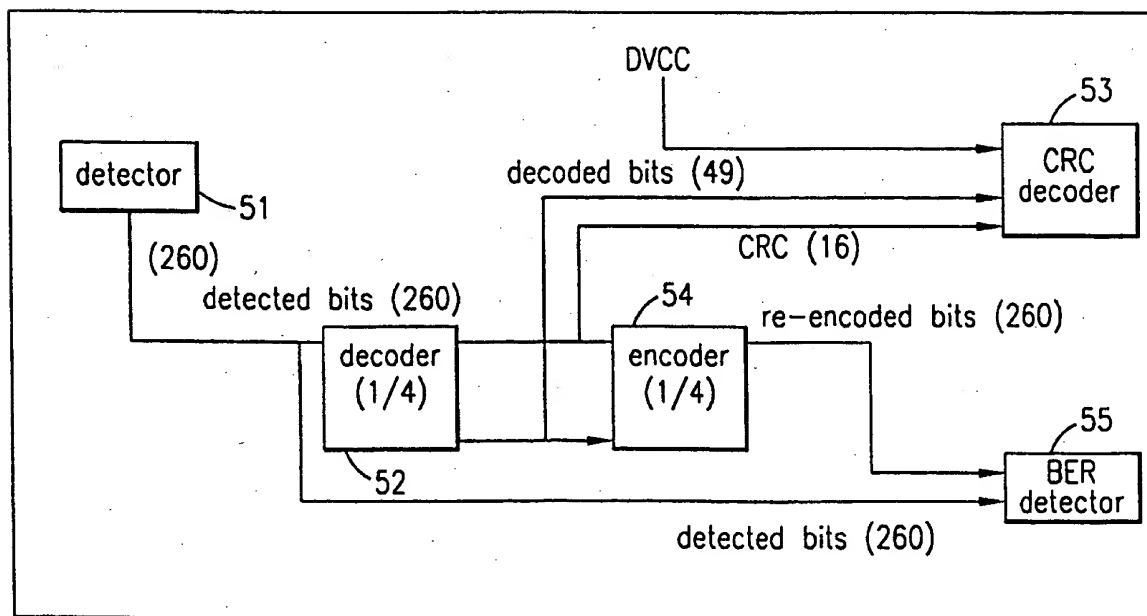


FIG. 5

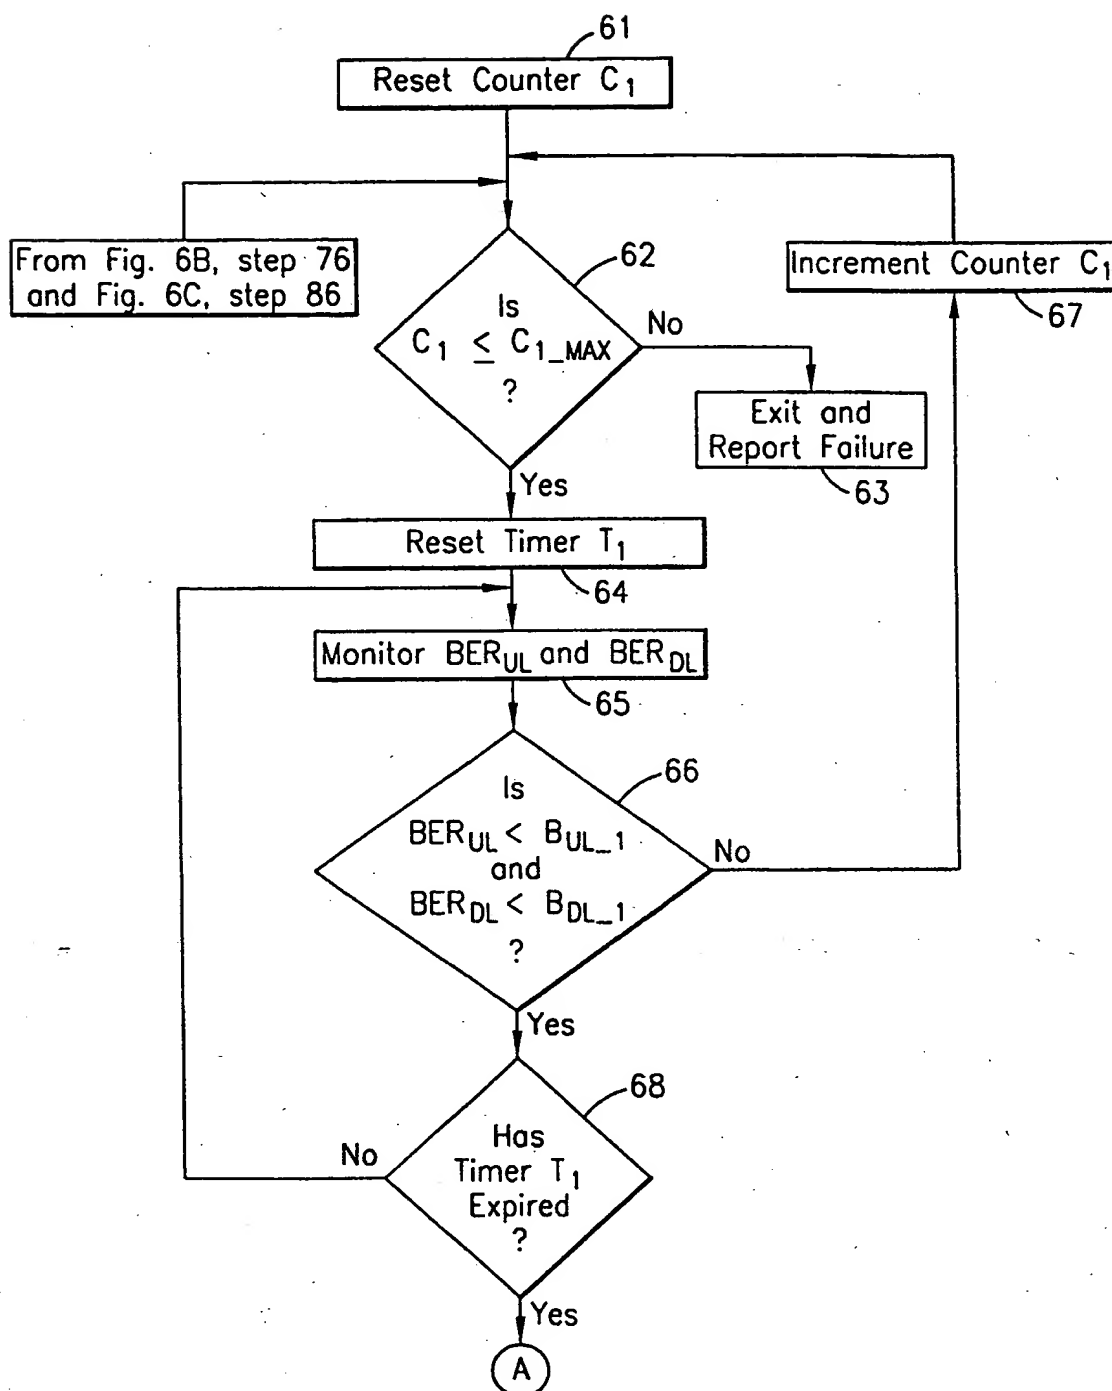
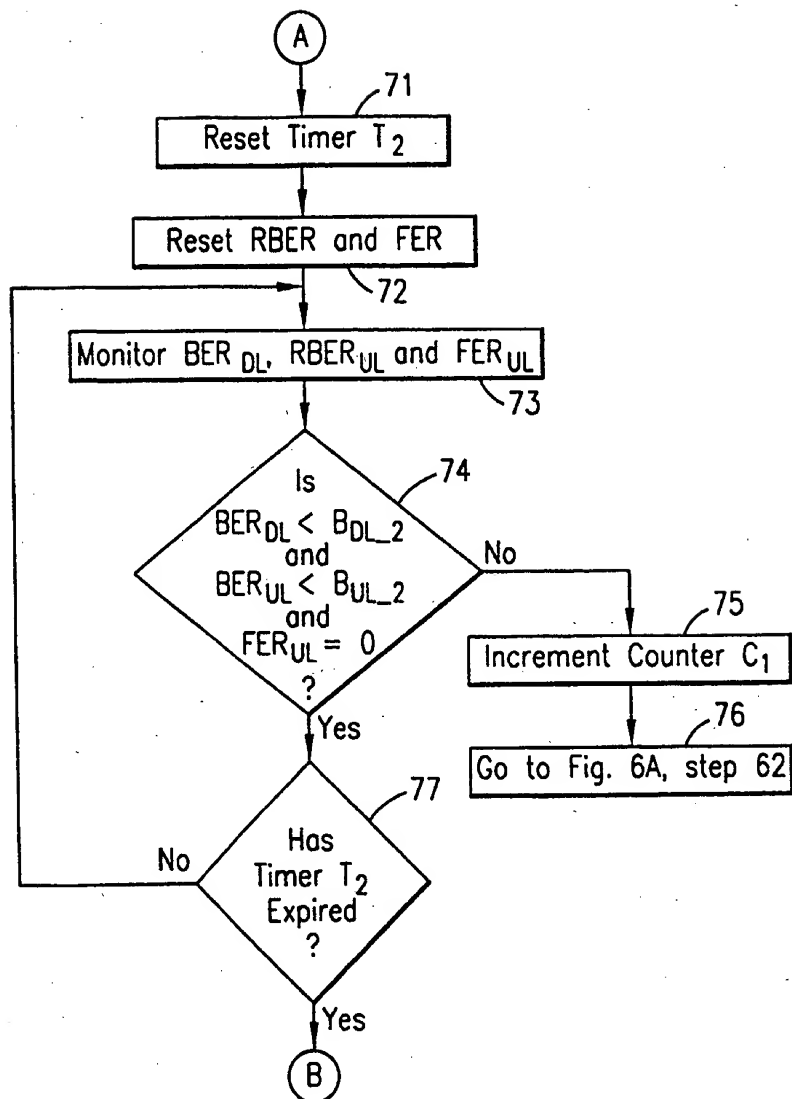


FIG. 6A

**FIG. 6B**

6/6

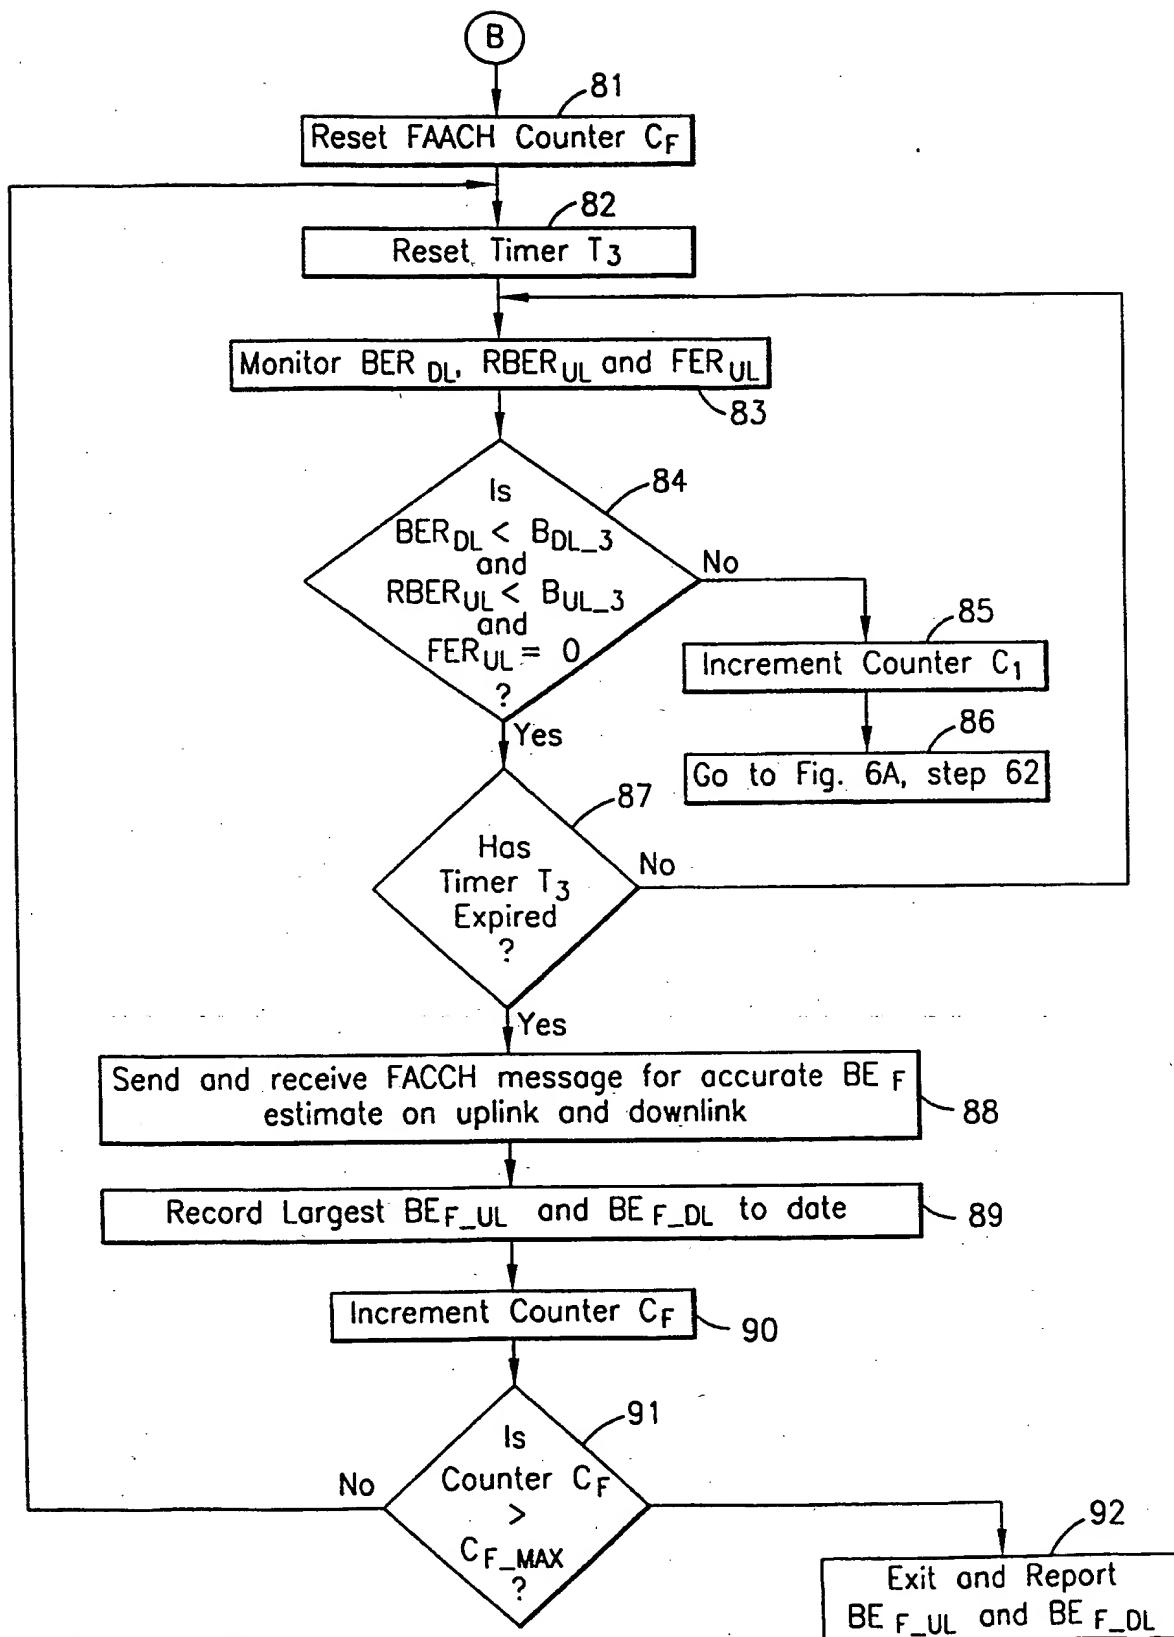


FIG. 6C

INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 98/00753

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04L1/12 H04L1/20

According to International Patent Classification(IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 472 511 A (ERICSSON TELEFON AB L M) 26 February 1992 see column 3, line 14 - line 33 see column 5, line 28 - column 7, line 8 ---	1-3
A	US 4 991 184 A (HASHIMOTO SHINJI) 5 February 1991 see column 2, line 2 - line 8 see column 3, line 60 - column 5, line 5 ---	1-3
A	US 5 406 562 A (RONEY IV EDWARD M) 11 April 1995 cited in the application see column 3, line 67 - column 5, line 2 see figure 1 --- -/--	1-3



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

25 August 1998

Date of mailing of the international search report

01/09/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Ghigliotti, L

INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 98/00753

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 257 401 A (DAHLIN ET AL) 26 October 1993 see column 12, line 48 - column 13, line 43 see column 13, line 64 - column 14, line 26 -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 98/00753

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0472511 A	26-02-1992	AT 150606 T	15-04-1997
		AU 642760 B	28-10-1993
		AU 8261991 A	27-02-1992
		CA 2049712 A	24-02-1992
		DE 69125227 D	24-04-1997
		DE 69125227 T	03-07-1997
		DK 472511 T	22-09-1997
		ES 2101736 T	16-07-1997
		GR 3022879 T	30-06-1997
		HK 100397 A	08-08-1997
		JP 4234232 A	21-08-1992
		NZ 239283 A	27-09-1994
		US 5327576 A	05-07-1994
US 4991184 A	05-02-1991	JP 1897863 C	23-01-1995
		JP 2162944 A	22-06-1990
		JP 6026343 B	06-04-1994
US 5406562 A	11-04-1995	CA 2116735 A	06-09-1994
US 5257401 A	26-10-1993	US 5042082 A	20-08-1991
		AU 625128 B	02-07-1992
		AU 5530090 A	16-11-1990
		CA 2030607 A	18-10-1990
		KR 9513303 B	02-11-1995
		WO 9013187 A	01-11-1990
		AU 626123 B	23-07-1992
		AU 5934090 A	17-01-1991
		AU 625085 B	02-07-1992
		AU 5969890 A	17-01-1991
		CA 2033340 A	27-12-1990
		CA 2033971 A	27-12-1990
		CN 1048472 A, B	09-01-1991
		DE 69021794 D	28-09-1995
		DE 69021794 T	22-02-1996
		DE 69022307 D	19-10-1995
		DE 69022307 T	08-02-1996
		EP 0406186 A	02-01-1991
		EP 0406193 A	02-01-1991
		HK 173995 A	24-11-1995

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 98/00753

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5257401 A		HK 180295 A	01-12-1995
		JP 4500446 T	23-01-1992
		JP 4500448 T	23-01-1992
		KR 9702756 B	10-03-1997
		KR 9709704 B	17-06-1997
		PH 26898 A	03-12-1992
		WO 9100657 A	10-01-1991
		WO 9100658 A	10-01-1991
		US 5008953 A	16-04-1991
		US 5200957 A	06-04-1993
<hr/>			

THIS PAGE BLANK (USPTO)